



SYSTEM PROJECT

Underfloor Heating on Insitu Concrete Slab


Medlock School Extension, Manchester



Contractor: Morgan Ashurst

Rehau underfloor heating pipes on insulation.

Pipes need to be secured to prevent lift during screeding.
Gyvlon should be minimum of 30mm over pipes.

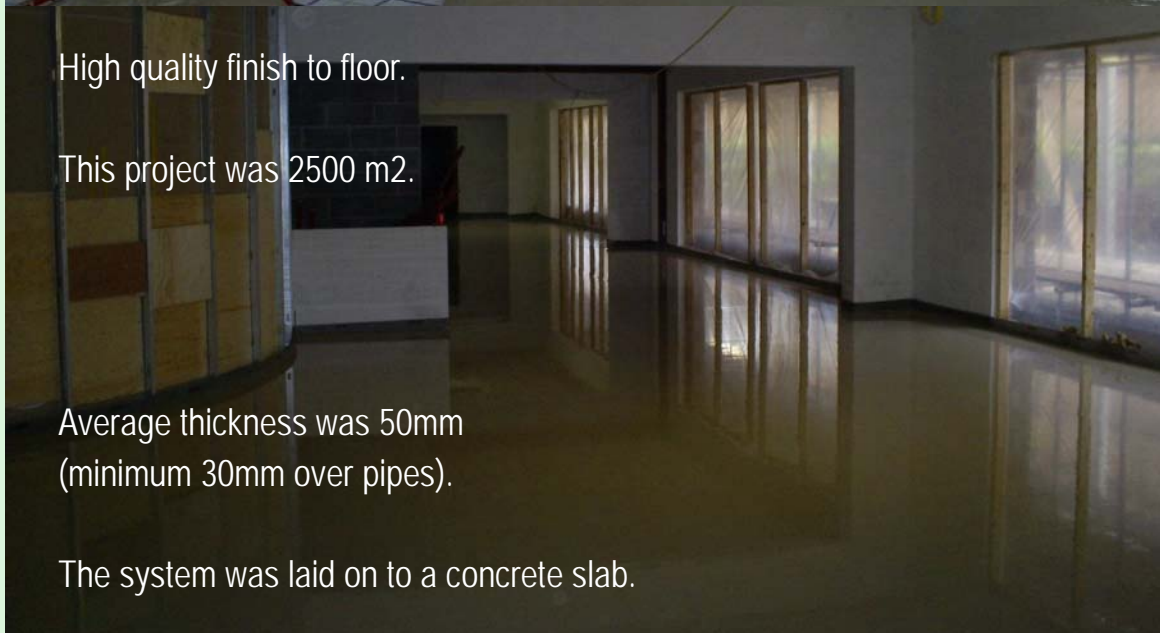

High quality finish to floor.

This project was 2500 m².

Average thickness was 50mm
(minimum 30mm over pipes).

The system was laid on to a concrete slab.

Case History

Lafarge Gyvlon Ltd
Europa Boulevard, Westbrook
Warrington WA5 7TN

