


FIRST CHOICE IN FLOWING SCREED



In-situ Concrete Slab
Use with reinforced concrete frame construction only

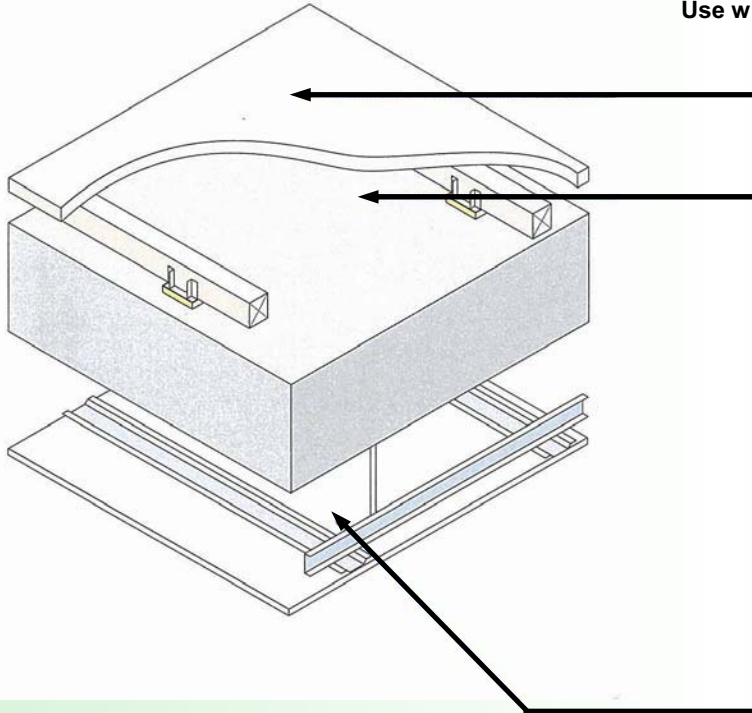

Floating Floor


Typical floor detail shown for illustration purposes only. See RDL handbook for suitable floating floor treatment.

Structural Floor

200mm (min) in-situ concrete floor slab, 2400kg/m³ (min) density with 40mm (min) Gyvlon screed nominal 80kg/m² mass per unit area directly applied to slab. See appendix A RDL handbook

Ceiling

Typical ceiling detail shown for illustration purposes only.

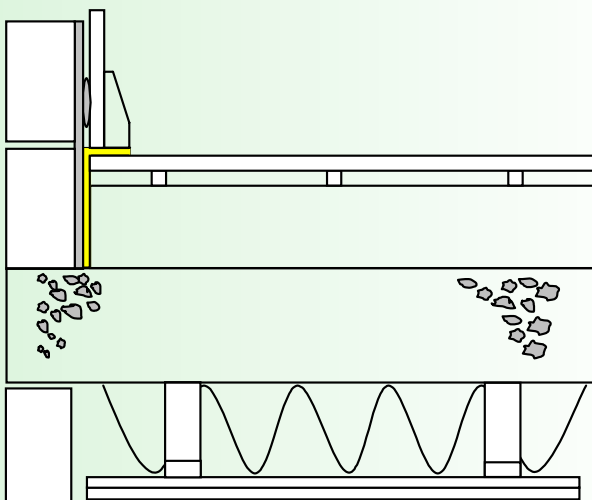

ROBUST DETAIL E-FC-2

LAFARGE GYVLON FLOWING SCREED
ROBUST DETAIL E-FC-2

Lafarge Gyvlon Ltd

Europa Boulevard, Westbrook Warrington WA5 7TN

Phone: 01925 428780 **Fax:** 01925 428788

Email: sales@gyvlon.co.uk

